


Classic Fence



Classic's v-shaped braces along the length of each panel add lateral strength, and its adaptability to elevation and directional changes (120° swing) make this fence ideal for nearly any application.

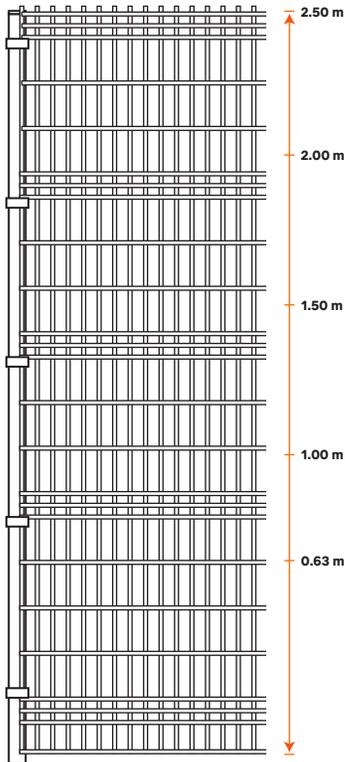

INSTALLATION ACCESSORIES

- 
Cap
UV Resistant Polypropylene
- 
Bracket
Stainless steel bolt and hinge
- 
Post extension
Extended at 45°
- 
Panel extension
Extended at 45°
- 
Base mount
Expansion plugs, nuts and washers

USES

- Adaptable to any project (schools, industry, infrastructure)

CHARACTERISTICS

- Galvanized wires with non-toxic powder coating
- Standard and marine finish
- V shaped braces at the ends of each panel for added strength
- Uniform welding on cross sections

ADVANTAGES


- Versatile desing and difficult to climb
- Coating 100% free of TGIC, lead and COVs
- Heavy-duty structural strength

PANEL

Height	Length	Opening	Brackets	Gauge		Weld-Shear Strength
				inch	mm	
25 3/8	95	2 x 6	2	6	4.89	1,051
48 7/8	95	2 x 6	2	6	4.89	1,051
62 1/16	95	2 x 6	3	6	4.89	1,051
73 5/16	95	2 x 6	4	6	4.89	1,051
97 7/8	95	2 x 6	5	6	4.89	1,051

Note: When installing a 25 3/8" or a 48 7/16" fence, it is recommended to place the panel ends downward to prevent child injuries.


STANDARD FINISH

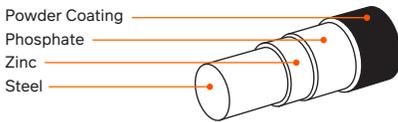

WARRANTY

1,000 hours of salt chamber according to ASTM B117 method.

MARINE FINISH

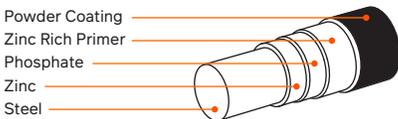

WARRANTY

4,000 hours of saline chamber and 7 years warranty.

COLORS



SYSTEM SPECIFICATIONS

Wire Breaking Load	80,000 – 100,000 psi
Espesor de pintura	100 microns

MEETS ASTM A-510 | A-641 | G-154-04 | NMX B-365 | B-507 | B-117



800 831 5700

ventas@deacero.com

deacero.com

