


Milan Fence



Milan's steel panels are topped with horizontally-reinforced sleek arches. Almost impossible to climb, Milan is the perfectly beautiful choice for medium-security projects.

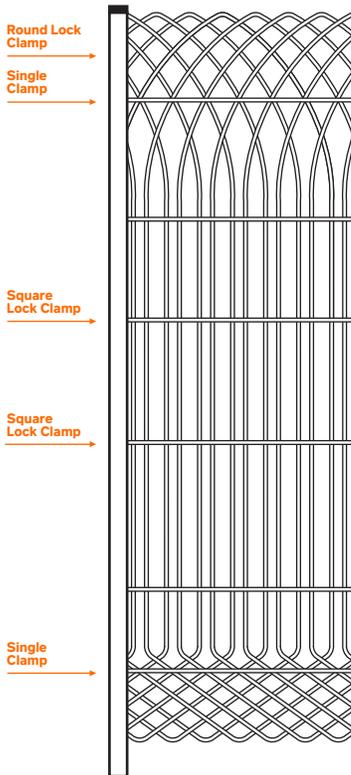

INSTALLATION ACCESSORIES



Cap
Polypropylene
70 x 90 x 30 mm
UV resistant



Base mount
Aluminum
125 x 150 x 58 mm



Post
Aluminum profile
62 x 85 mm



Round Lock Clamp / Square Lock Clamp
55 x 34 x 10 mm



Single Clamp
3 x 30 x 11 mm

- 2 stainless steel clamps M 10 x 12 mm
- 1 stainless steel car head screw M 10 x 60 mm with nut and washer
- 4 anchor plugs 3/8" x 3"

USES

- Parks and hotels
- Residential areas
- Playgrounds

CHARACTERISTICS


- Galvanized wires with non-toxic powder coating.
- Uniform welding on cross sections
- Curved and smooth finishes

ADVANTAGES

- Difficult to climb
- Patented design with finishes that do not put children at risk
- Recubrimiento 100% libre de TGIC, plomo y COVs

Height	Length	Gauge	
		cal.	mm
62 15/16	87 3/8	4	6
81 7/8	87 3/8	4	6

STANDARD FINISH

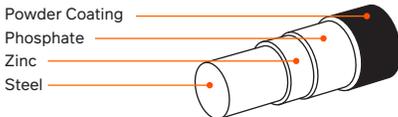

WARRANTY

1,000 hours of salt chamber according to ASTM B117 method.

SYSTEM SPECIFICATIONS

Wire Breaking Load	Wire Tensile Strength
psi	Lb/minimum
55,000 - 70,000	2,500

COLORS



MEETS ASTM-510 | A641 | ASTM B-117 | NOM B-365
NOM B-507 | G-154-04.



800 831 5700

ventas@deacero.com

deacero.com

