


# Contempo Fence



**REJA**  
DEACERO



Contempo's 4 gauge vertical and double-1-gauge horizontal steel make this fence an exceptional security solution for even the highest levels of security, including multilevel and slope installations.

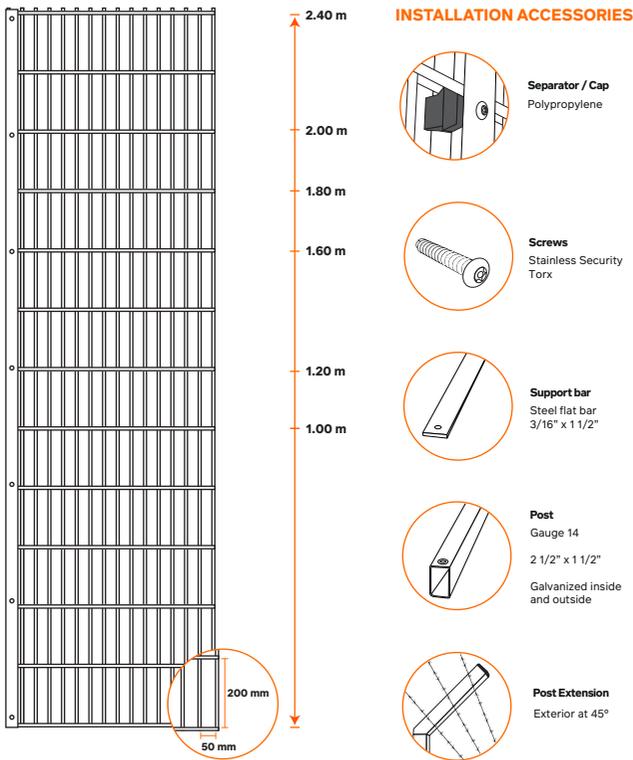

## USES

- Industrial areas
- High security facilities
- Sports complex

## CHARACTERISTICS

- Galvanized wires with non-toxic powder coating
- Standard and marine finish
- Double horizontal reinforcing wire
- Uniform welding on cross sections

## ADVANTAGES

- High resistance to impacts and loads
- Coating 100% free of TGIC, lead and COVs
- Minimalist and uniform design

## SYSTEM SPECIFICATIONS

Panel opening	2 x 8 mm
<b>Heavy Duty Design</b>	
Vertical wires breaking load	75K – 105K psi
Horizontal wires breaking load	75K – 105K psi
lb./inch <sup>2</sup> wire gauges	4 (vertical) - 1/0 (horizontal)

## COLORS




**MEETS** ASTM A-510 | A-641 | G-154-04 | NMX B-365 | B-507 | B-117



# Contempo Fence




## STANDARD FINISH

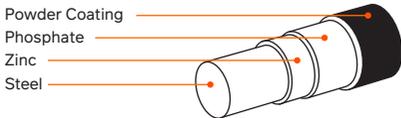

**WARRANTY**  
1,000 hours of salt chamber according to ASTM B117 method.

## MARINE FINISH

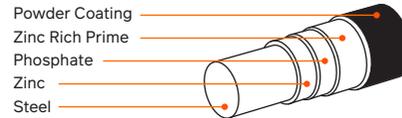

**WARRANTY**  
4,000 hours of saline chamber and 7 years warranty.

## PANEL

Design	Height	Width	Opening
	in	in	in
Heavy Duty	48 7/16	95 5/8	2 x 8
	72 1/16	95 5/8	2 x 8
	95 5/8	95 5/8	2 x 8
	120 1/16	98 11/16	2 x 8

Note: When installing a 48 7/16" fence, it is recommended to place the panel ends downward to prevent child injuries.

## VERTICAL ROD

Design	Breaking load	Gauge		Zinc layer
	psi	cal.	mm	grs/m <sup>2</sup>
Heavy duty	75K - 105K	4	6	92

## DOBLE HORIZONTAL WIRE

Design	Breaking load	Gauge		Zinc layer
	psi	cal.	mm	grs/m <sup>2</sup>
Heavy duty	75K - 105K	1	8	92