



Rebar Grade 60

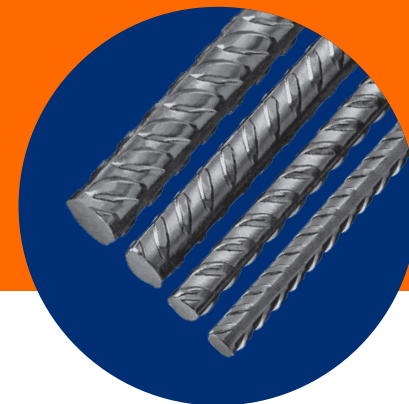

Corrugated steel bar that optimizes the amount of steel needed for concrete reinforcement without affecting job specifications.

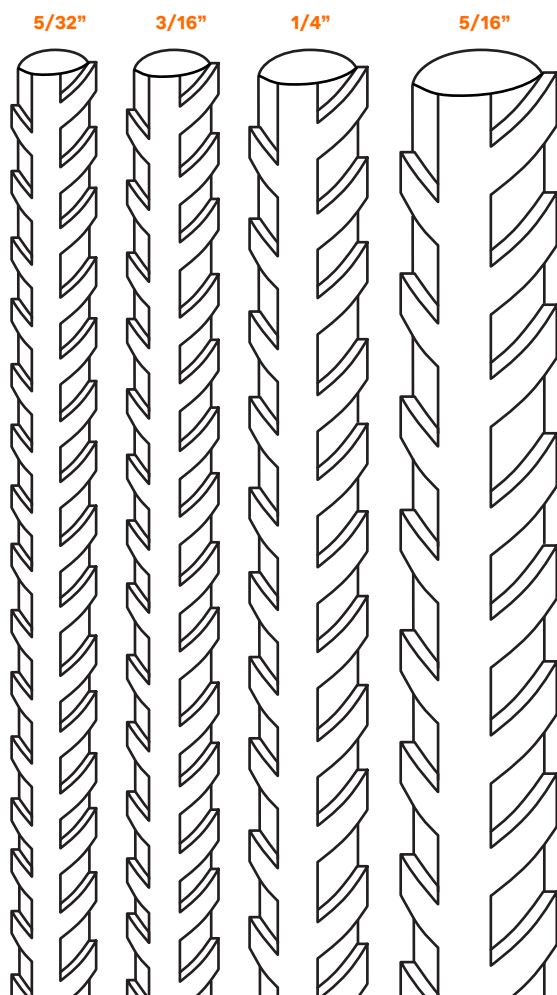

USES

- Rings or stirrups
- Beams and columns
- Solid and lightened slabs

CHARACTERISTICS

- Herringbone corrugated
- Polished finish
- Cold rolled

ADVANTAGES

- Cost reduction in budget
- High ductility
- Higher strength than grade 42 rebar

REBAR SPECIFICATIONS

Finish	Corrugated
Tensile strength	70 kg/mm ²
Creep strength	60 kg/mm ²

GRADE 60 REBAR

Code	Diameter	Area	Weight	Length	Weight per rebar	Rebars (6m) per ton min.
	in	cm ²	kg/m	m	kg	#
2425	5/16	0.495	0.388	6	2.33	421
1701	1/4	0.317	0.248	6	1.49	672
1702	3/16	0.178	0.140	6	0.84	1,151
1703	5/32	0.124	0.097	6	0.58	1,661

MANUFACTURING STANDARD NMX-B-072