



Stirrups 1/4"

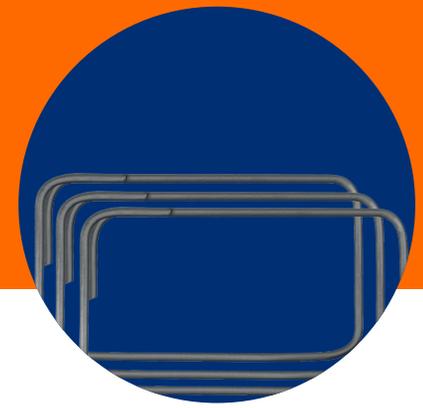

Closed transverse reinforcement that confines the longitudinal rebars that make up the reinforcement of reinforced concrete columns or beams.

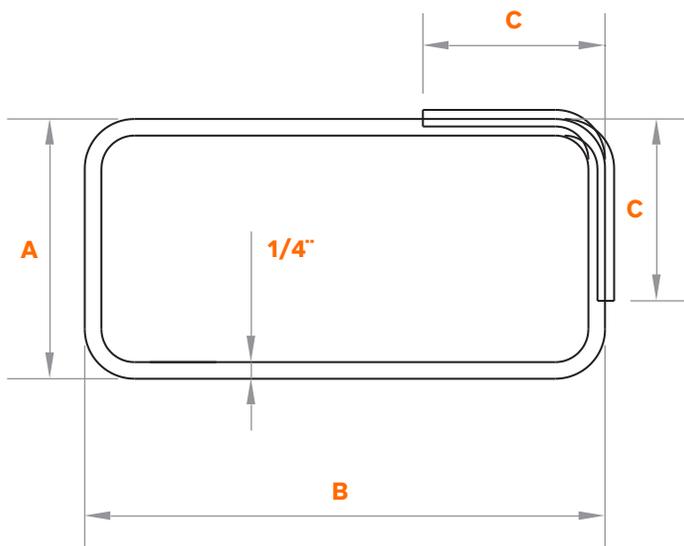

USES

- Reinforcement of confining elements of masonry walls such as:
 - Columns
 - Ring beams
 - Foundation beams

SOLUTIONS

- Armuro

CHARACTERISTICS

- 1/4" diameter hot-rolled plain wire rod
- Uniform cutting and bending
- Uniform bar-shaped packaging

ADVANTAGES

- Reduces time and labor in the preparation
- Optimizes storage space
- Material waste is eliminated

NOMINAL DIMENSIONS

Design	Dim. A	Dim. B	Dim. C
	cm	cm	cm
15x15-4	10.0	10.0	7.0
15x20-4	10.0	15.0	7.0
15x22-4	10.0	17.0	7.0
15x25-4	10.0	20.0	7.0
15x30-4	10.0	25.0	7.0
15x35-4	10.0	30.0	7.0
20x20-4	15.0	15.0	7.0
25x25-4	20.0	20.0	7.0

PRESENTATION: Uniform packaging in the form of a bar.

STIRRUP SPECIFICATIONS

Nominal diameter	= 0.250" (6.35 mm)
Minimum yield stress	= 2,300 kg/cm ²

MANUFACTURING STANDARD NMX-B-365-CANACERO-2017