



Hog Flooring

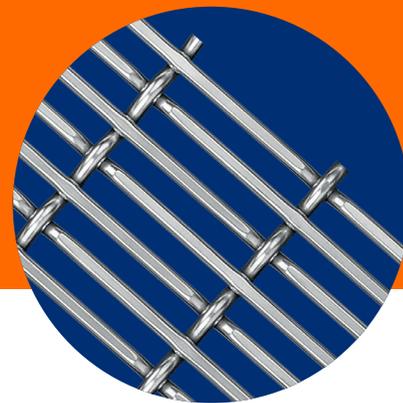

Floor woven with thick galvanized steel wires that interact with the movement of the animals, eliminating the debris that falls on it.

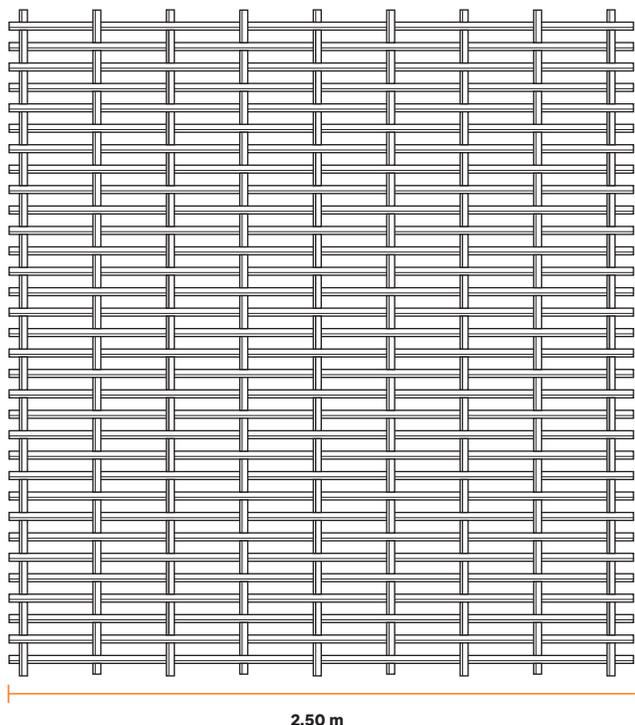

USES

- Pig breeding farms
- Pig and cattle farms
- Industrial grating and flooring

CHARACTERISTICS


- Wide openings, woven, not welded
- Specification according to the aging period
- Galvanized

ADVANTAGES


- Eliminates moisture faster than plastic
- Easy to clean and long-lasting
- Surfaces cleaner of feces
- 65% less use of water
- Smooth surface without cracks

WIRE SPECIFICATIONS


Coating	Galvanized Commercial Grade
Longitudinal Tensile Strength	65 ksi (Cal. 00-3-4-6)



Opening 9.5 x 76 mm
Gauge 00



Opening 8.0 x 50 mm
Gauge 4 and 6



Opening 9.5 x 38 mm
Gauge 00, 4 and 6



Gauge 00



Gauge 3



Gauge 4



Gauge 6

MANUFACTURING STANDARD (GALVANIZED WIRE)
NMX-13-507-CANACERO-2016

Stage	Gauge		Diameter		Opening between panels
	gauge	mm	mm	inch	mm
Gestation	00	8.40	7.85	0.309	9.5 x 38
Gestation	00	8.40	7.85	0.309	9.5 x 76
Gestation	3	6.19	6.12	0.241	9.5 x 38
Fattening	00	8.40	7.85	0.309	9.5 x 38
Fattening	00	8.40	7.85	0.309	9.5 x 76
Fattening	3	6.19	6.12	0.241	9.5 x 38
Maternity	00	8.40	7.85	0.309	9.5 x 38
Maternity	00	8.40	7.85	0.309	9.5 x 76
Maternity	3	6.19	6.12	0.241	9.5 x 38
Weaning	4	5.72	5.64	0.222	9.5 x 38
Weaning	3	6.19	6.12	0.241	9.5 x 38
Weaning	4	5.72	5.64	0.222	9.5 x 38
Weaning	4	5.72	5.64	0.222	8.0 x 50
Weaning	6	4.88	4.80	0.189	9.5 x 38
	6	4.88	4.80	0.189	8.0 x 50

All floors are custom made with a maximum width of 2.50 m.