


# Polished Chain




DEACERO® chains have minimal elongation and have been fully tested for strength, tension, and torsion.

Polished chain



25 and 50 kg pails

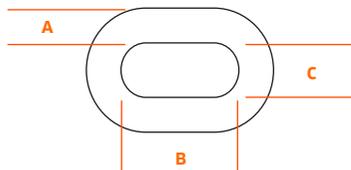

Link dimensions

## USES

- Securing fences and gates
- Material handling, loading and unloading
- Limiting an access

## CHARACTERISTICS

- Electro-welded links
- Cold formed grade 30
- Finish polished

## ADVANTAGES

- Increased cost effectiveness per meter
- High-tensile strength
- Minimum elongation

## POLISHED CHAIN

Code	Commercial measurement (A)		Link dimensions (internal)		Tensile strength		Length
	inch	mm	Long (B) mm	Width (C) mm	Working kg	Breaking kg	
37916	1/8	4.0	23.0	6.8	180	726	89.20
37917	3/16	4.8	26.5	8.5	365	1451	58.70
37918	1/4	6.4	27.0	10.5	580	2358	30.40
30480	5/16	7.9	31.0	13.5	860	3440	37.70
30481	3/8	9.5	32.5	15.0	1200	4808	25.20
30482	1/2	12.7	40.0	18.0	2030	8164	13.90

\*Working load: Maximum load to which the chain can be subjected to ensure that it does not break and remains outside the risk zone.

## CHAIN SPECIFICATIONS

Finish Polished

**MANUFACTURING STANDARDS** ASTM A-413