


Common Nails

1" - 1 1/2"



A nail made of wire with a polished coating used in construction.

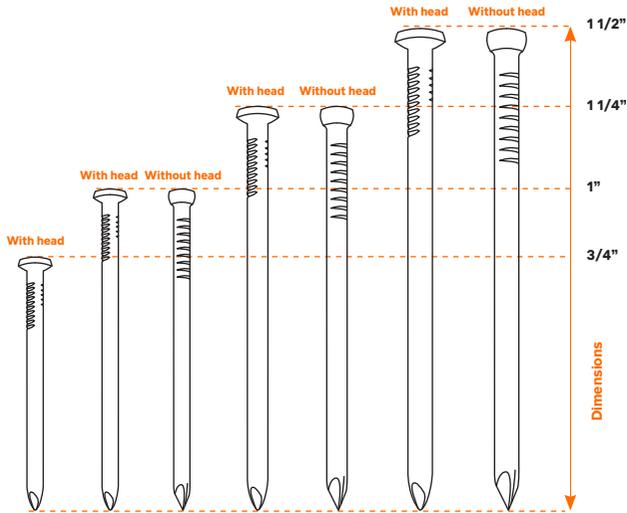

USES

- Masonry
- Carpentry
- Wooden pallets and structures

CHARACTERISTICS

- With or without head
- Different gauges and lengths

ADVANTAGES

- Wide variety of designs
- Headless nails are best suited for surfaces to be repaired.

WITH HEAD

Code per 25 kg carton	Length		Gauge	Approx. nails per kg
	inch	mm		
1240	3/4	19	14.5	41763
1241	1	25	14.5	1593
1242	1 1/4	32	14.5	1316
3119	1 1/2	38	14.5	1121

Code per 25 kg carton	Length		Gauge	Approx. nails per kg
	inch	mm		
37136	1	25	14.5	1593
37138	1 1/2	38	14.5	1121

Code per 25 kg carton	Length		Gauge	Approx. nails per kg
	inch	mm		
22749	1	25	14.5	1593
22750	1 1/2	38	14.5	1121

WITHOUT HEAD

Code per 25 kg carton	Length		Gauge	Approx. nails per kg
	inch	mm		
1249	1	25	16	2341
38972	1 1/4	32	14.8	1195
1250	1 1/2	38	14.5	1083

Code per 25 kg carton	Length		Gauge	Approx. nails per kg
	inch	mm		
37139	1	25	16	1593
37140	1 1/2	38	15	1121

Code per 25 kg carton	Length		Gauge	Approx. nails per kg
	inch	mm		
22751	1	25	16	2341
22752	1 1/2	38	14.5	1083

NAIL SPECIFICATIONS

Coating		Polished
Minimum head diameter	3/4"	0.170" - 0.187"
	1"	0.170" - 0.187"
	1 1/4"	0.170" - 0.187"
	1 1/2"	0.170" - 0.187"

MANUFACTURING STANDARD NMX B-505