


Galvanized Nails for Concrete



It is a nail made with 8-gauge wire and its surface is tempered for greater impact resistance.

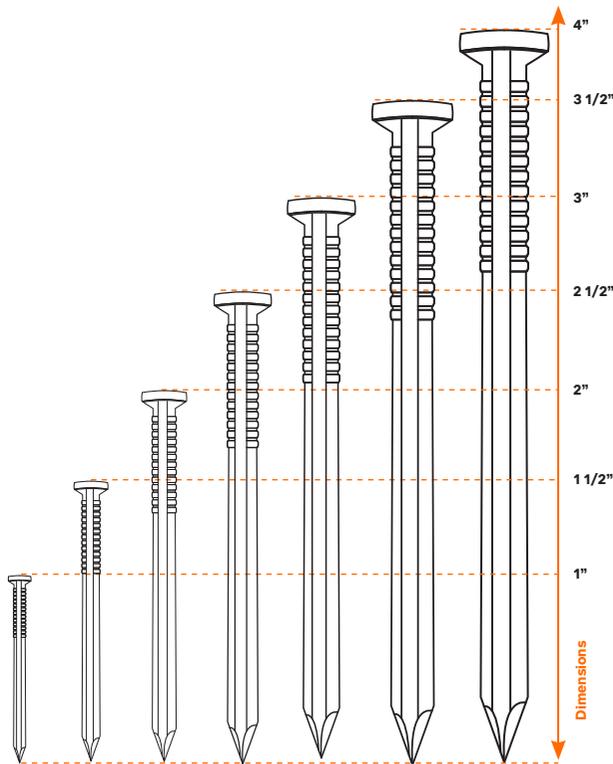

USES

- Brick or block construction
- Concrete surfaces
- For driving into masonry

CHARACTERISTICS

- Galvanized coating
- Grid marked head
- Tempering heat treatment

ADVANTAGES

- Penetrates hard surfaces more easily
- Better support due to its shape
- Rust resistant
- Difficult to break or bend

GALVANIZED NAIL

Code per 20 kg box	Length		Gauge	Approx. nails per kg
	inch	mm		
38470	1	25	8	335
38471	1 1/2	38	8	232
38472	2	51	8	177
38473	2 1/2	63	8	143
38474	3	76	8	120
38475	3 1/2	89	8	104
41007	4	102	8	98

Code per 10 kg box	Length		Gauge	Approx. nails per kg
	inch	mm		
22753	2	51	8	177
22754	2 1/2	63	8	143
22755	3	76	8	120

NAIL SPECIFICATIONS

Coating	Galvanized
Nail diameter	0.161 - 0.164
Minimum head diameter	0.289

MANUFACTURING STANDARD NMX B-505