


Black Coating Nails for Concrete



It is a nail made with 8-gauge wire and its surface is tempered for greater impact resistance.

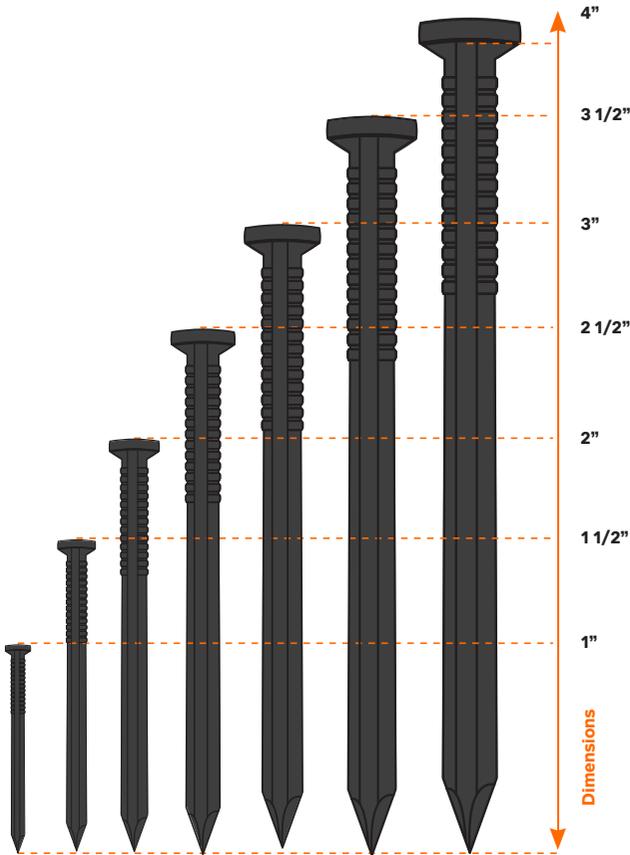

USES

- Brick or block construction
- Concrete surfaces
- For driving into masonry

CHARACTERISTICS

- Black Coating
- Grid marked head
- Tempering heat treatment

ADVANTAGES

- Penetrates hard surfaces more easily
- Better support due to its shape
- Rust resistant
- Difficult to break or bend

BLACK COATED NAIL

Code per 20 kg box	Code per box 20 bags of 1 kg	Length		Gauge	Approx. nails per kg
		inch	mm		
38464	38495	1	25	8	335
38465	-	1 1/2	38	8	232
38466	38497	2	51	8	177
38467	38498	2 1/2	63	8	143
38468	38499	3	76	8	120
38469	38500	3 1/2	89	8	104
41029	-	4	102	8	98

Code per 10 kg box	Length		Gauge	Approx. nails per kg
	inch	mm		
22743	1	25	8	335
22744	1 1/2	38	8	232
22746	2	51	8	177
22747	2 1/2	63	8	143
22748	3	76	8	120

NAIL SPECIFICATIONS

Coating	Black
Nail diameter	0.161 - 0.164
Minimum head diameter	0.289

MANUFACTURING STANDARD NMX B-505